


Dual NPN+PNP Small Signal Transistor

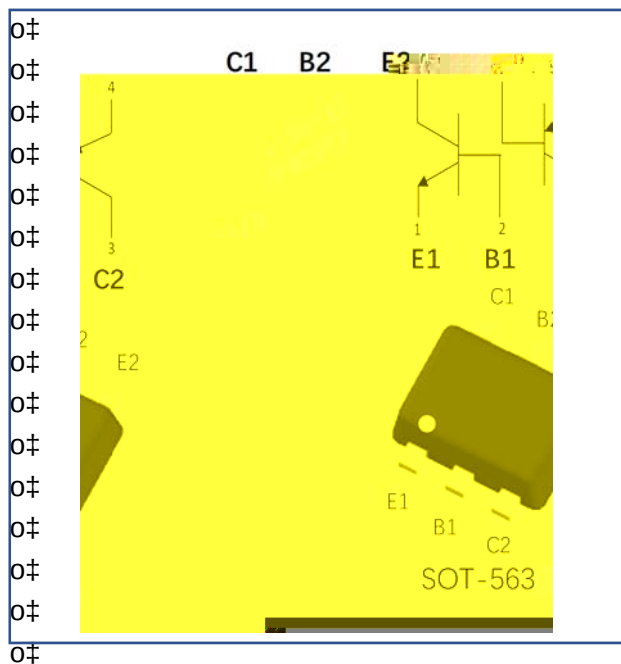

Features

- z 0RLVWXUH VHQVLWLYLW\ OHYHO
- z +DORJHQ IUHH DQG 5R+6 FRPSOL
- z 6XUIDFH PRXQW SDFNDJH LGHDO
- PDWLF ,QVHUWLRQ

Application

- z 6LJQDO DPSOLILFDWLRQ
- z 6ZLWFKLQJ FLUFXLW

Mechanical data

- z Package SOT-563
- z Terminals Tin plated leads , solderable per J-STD-0 0 2 and JESD22-B1 0 2

0†

TR1-NPN

Item	Symbol	Unit	Conditions	Value
Device marking code				Z7
Collector-base voltage	V_{CBO}	V	$I_C = 100 \mu A, 0$	15
Collector-emitter voltage	V_{CEO}	V	$I_C = 1mA, \beta = 0$	12
Emitter-base voltage	V_{EBO}	V	$I_E = 100 \mu A, 0$	6
Collector current	I_C	mA		500
Power dissipation	P_D	mW		150
Junction temperature	T_J	°C		-55 to +150

Unless otherwise specified)



EMZ7

RoHS
COMPLIANT

TR2-PNP

Item	Symbol	Unit	Conditions	Value
Collector-base voltage	V_{CB0}	V	$I_C = -100\mu A, 0$	-15
Collector-emitter voltage	V_{CE0}	V	$I_C = -1mA, I_B = 0$	-12
Emitter-Base voltage	V_{EB0}	V	$I_E = -100\mu A, 0$	-6
Collector current	I_C	mA		-500
Power dissipation	P_D	mW		150
Junction temperature	T_J			-55 to +150
Storage temperature	T_{TG}			-55 to +150

TR1-NPN

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	$V_{(BR)CBO}$	V	$I_C = 100\mu A, 0$	15		
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	V	$I_C = 1mA, I_B = 0$	12		
Emitter-base breakdown voltage	$V_{(BR)EBO}$	V	$I_E = 100\mu A, 0$	6		

Collector-base cut-off current I_{CB0}



EMZ7

RoHS
COMPLIANT

TR2-PNP

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	$V_{(BR)CBO}$	V				



EMZ7

RoHS
COMPLIANT





Fig 7 P_D -Ta Curve

TR2-PNP

Fig 1 Static Characteristics

Fig 2 DC Current Gain Characteristics

oratio Fig 3 Collector-Emitte f t



EMZ7


RoHS
COMPLIANT



EMZ7

RoHS
COMPLIANT

0†
0†
0†
0†





0‡

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability, the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility for any damages resulting from such improper use of sale.

This publication supersedes and replaces all information previously supplied. For additional information, please visit our website: [http : www . 21yang j ie . com](http://www.21yangjie.com) or consult your nearest Yangjie sales office for further assistance.