




μ

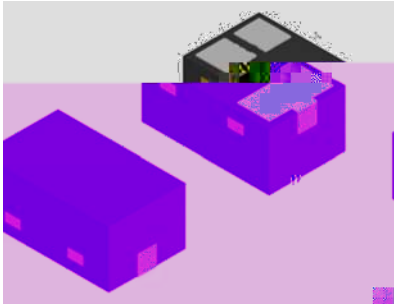

DFN1006 3L

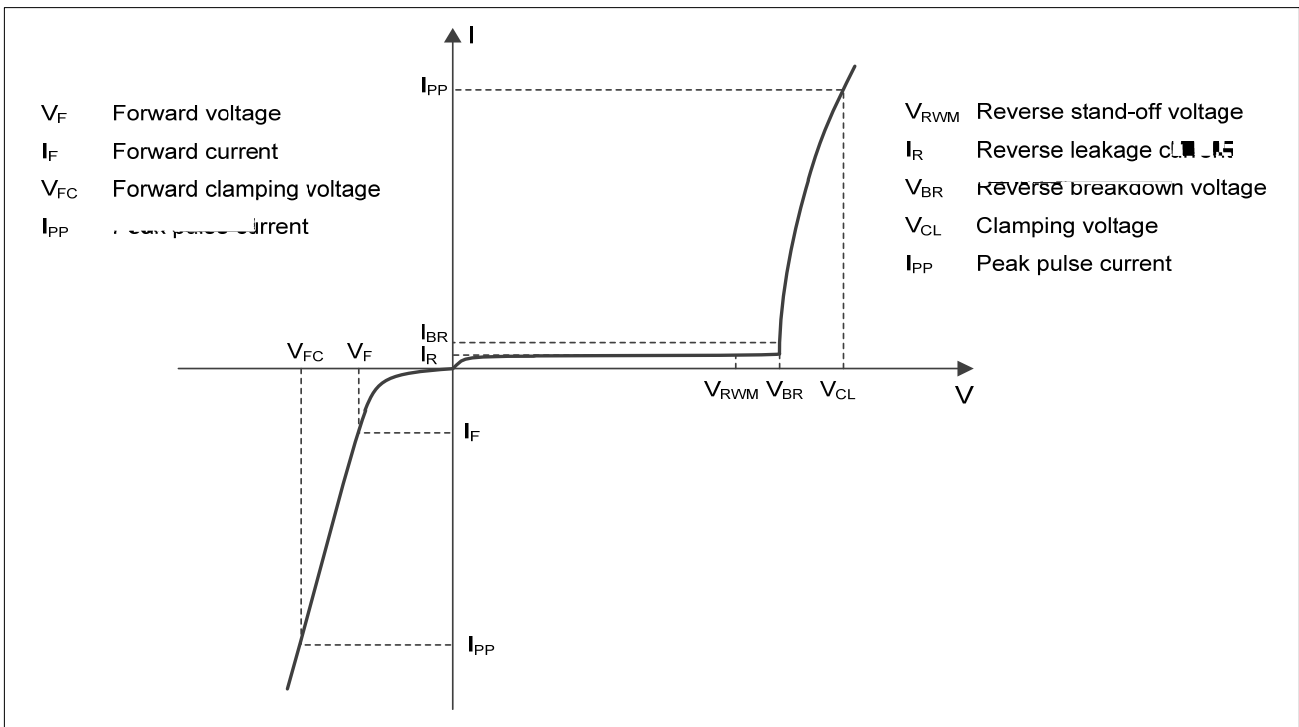




		Rating	
--	--	--------	--



8/20 μ s waveform per IEC61000 4 5




Contact discharge current waveform per IEC61000 4 2

lamping voltage vs. Peak pulse current

Capacitance vs. Reverse voltage

Non repetitive peak pulse power vs. Pulse time

Power derating vs. Ambient temperature

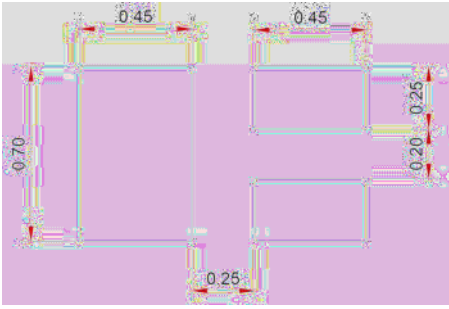

Notes:

This recommended land pattern is for reference purposes only. Please consult your manufacturing group to ensure your PCB design guidelines are met

