



Maximum Ratings

Symbol	Conditions	Values	Units
V_R		100	V
$I_{F(AV)}$	$T_C=125^{\circ}\text{C}$, Per Diode	200	A
	$T_C=125^{\circ}\text{C}$, Per Module	400	A
I_{FSM}	1/2 Cycle , 60Hz, Sine	3000	A

Torque	Recommended M6	3 4.7	N·m
Weight		92	g


Thermal Characteristics

Symbol	
--------	--



Package Outline Information

CASE: F3

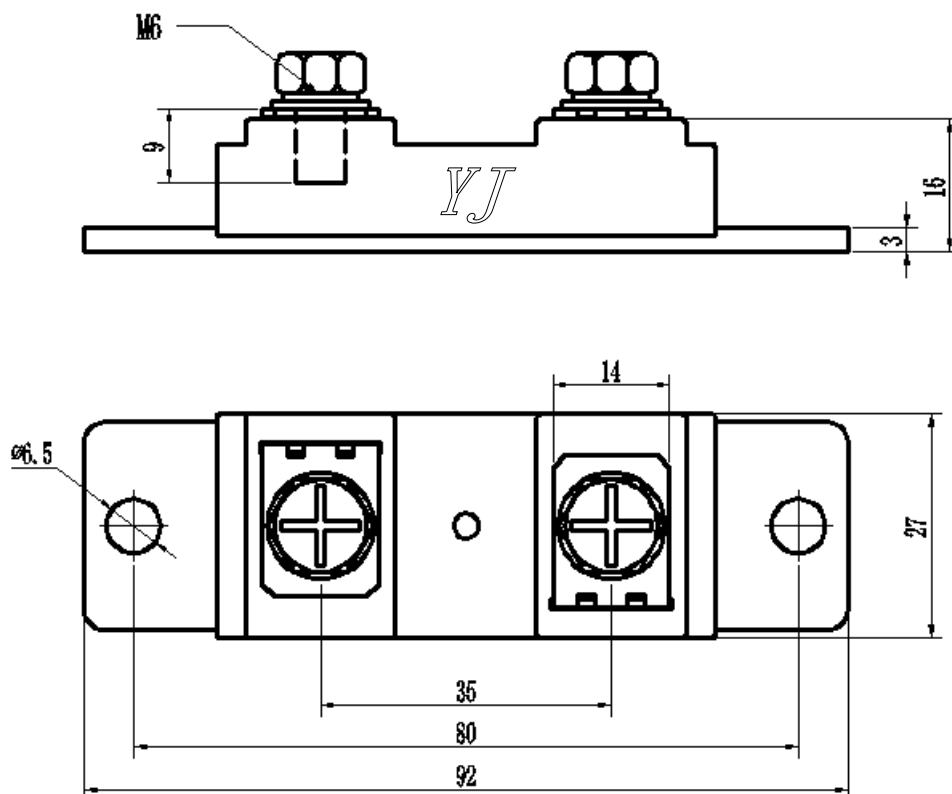

Dimensions in mm