

### Maximum Ratings

| Symbol | Conditions   | Values | Units |
|--------|--------------|--------|-------|
|        |              |        |       |
|        |              |        |       |
|        |              |        |       |
|        |              |        |       |
|        |              | 16200  |       |
|        | AC, Ton=1min |        |       |
|        |              |        |       |
|        |              |        |       |

## Electrical Characteristics

| Symbol | Conditions | Values |
|--------|------------|--------|
|--------|------------|--------|

### Performance Curves

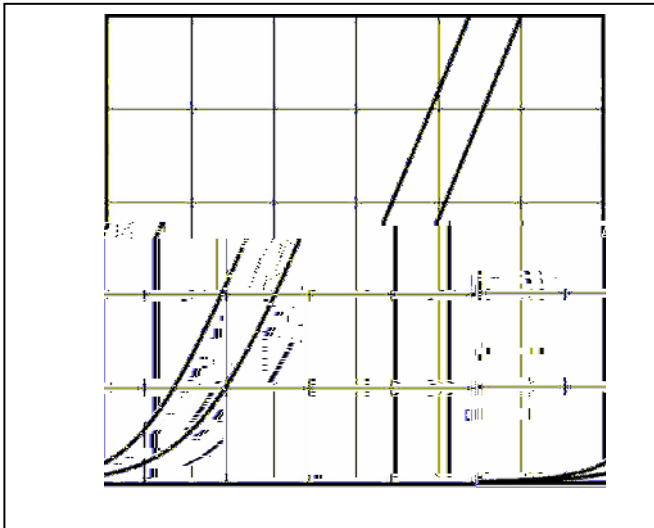


Fig1. Forward Voltage Drop vs Forward Current

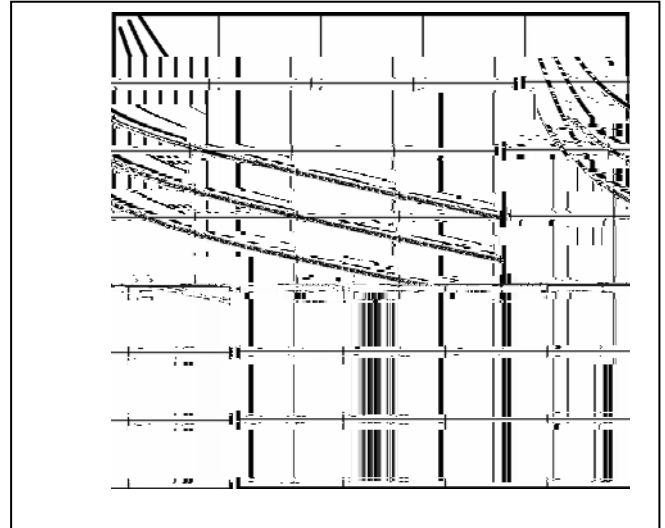


Fig2. Reverse Recovery Time vs di<sub>F</sub>/dt




Fig3. Reverse Recovery Current vs di<sub>F</sub>/dt



Fig4. Reverse Recovery Charge vs di<sub>F</sub>/dt

## Package Outline Information

CASE: F2

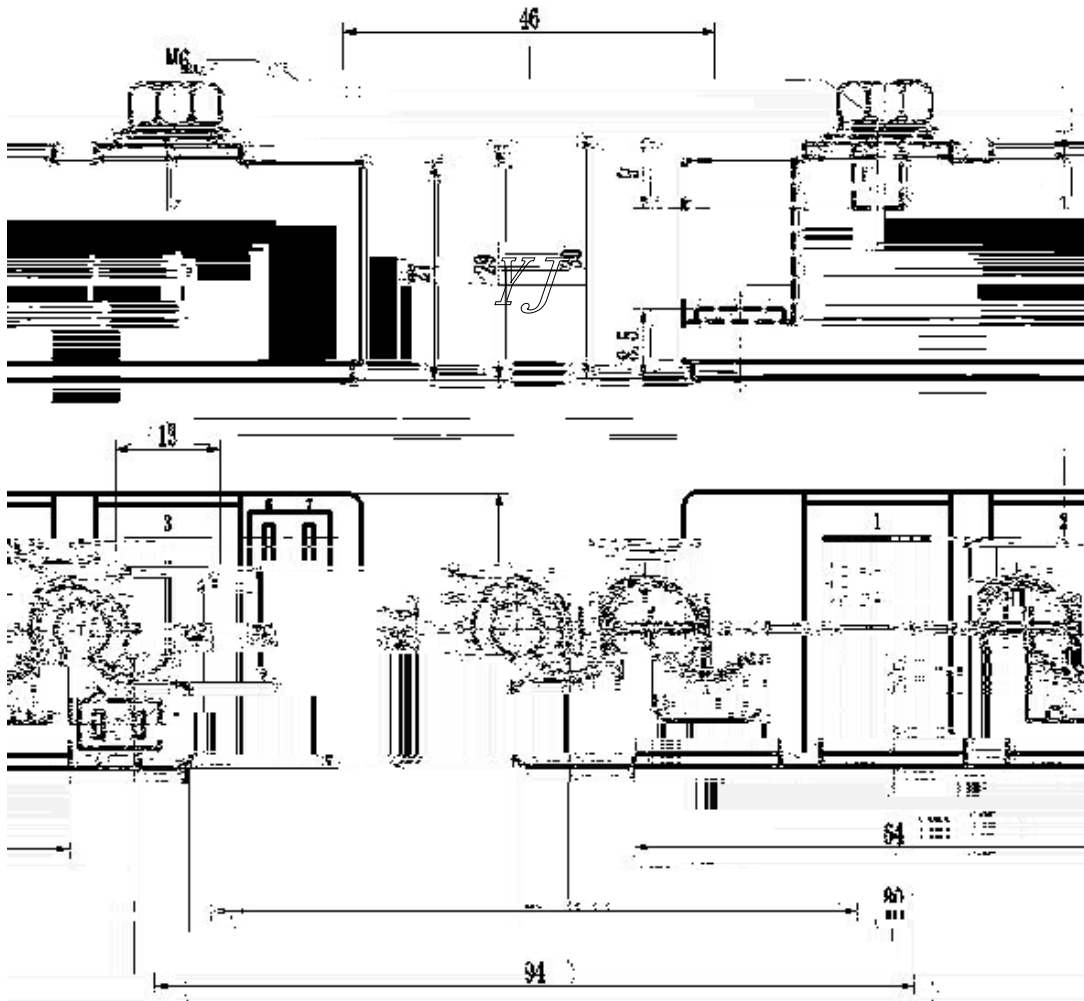

Dimensions in mm