



1- Line, Bi-directional, ESD protection diode

Features

1" đ ỚnỨ ▶ ∥ M

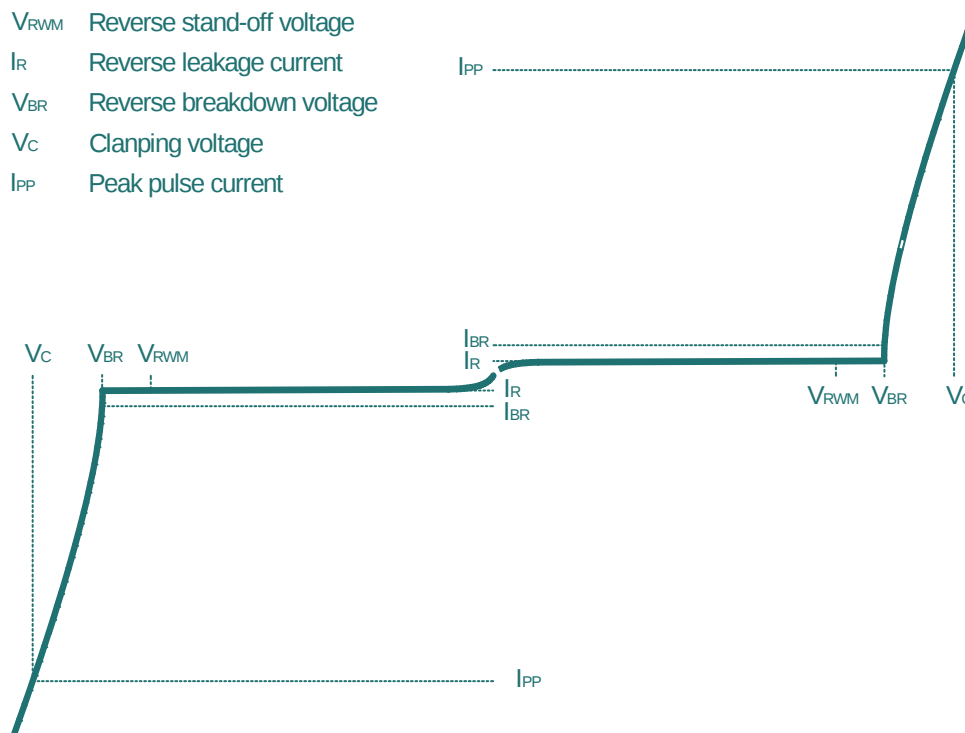

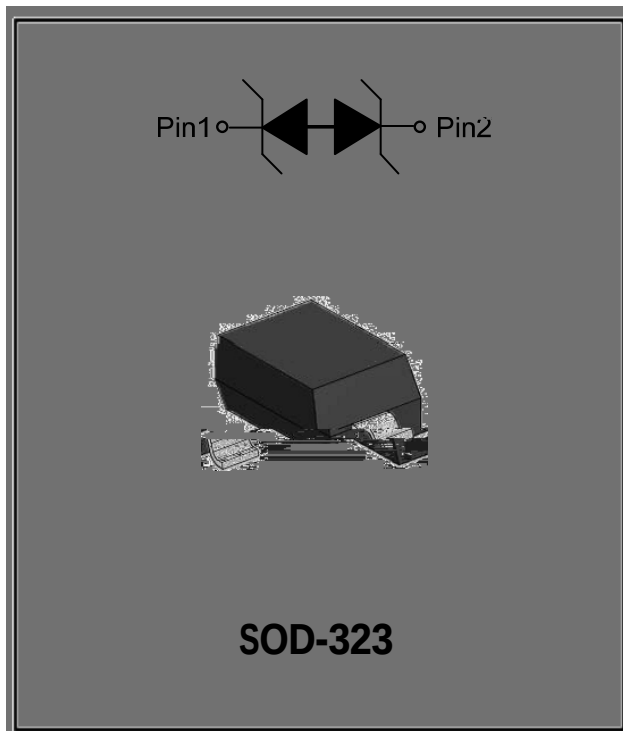

■ Characteristics (Typical)

Fig.1: 8/20 μ s Pulse Waveform

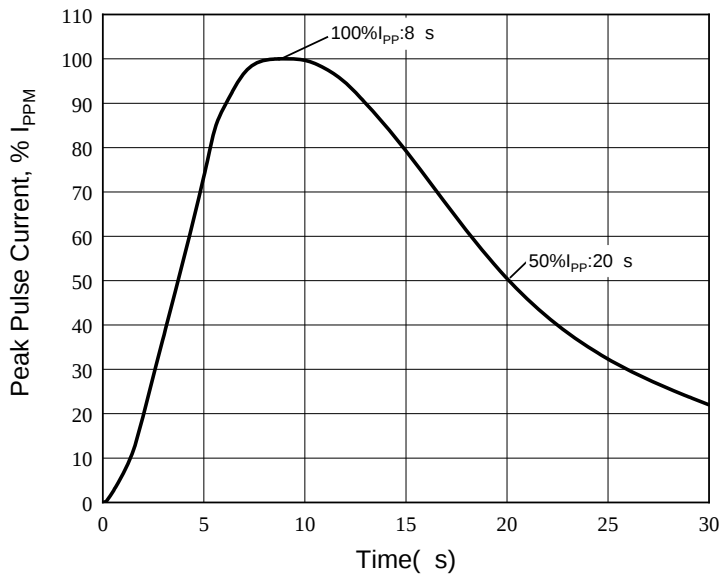


Fig.2: Capacitance vs. Bias

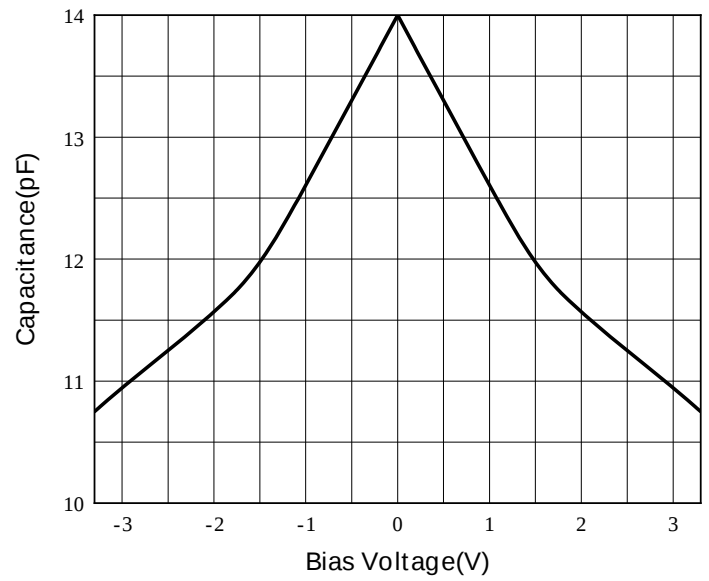


Fig.3: Power Derating Curve


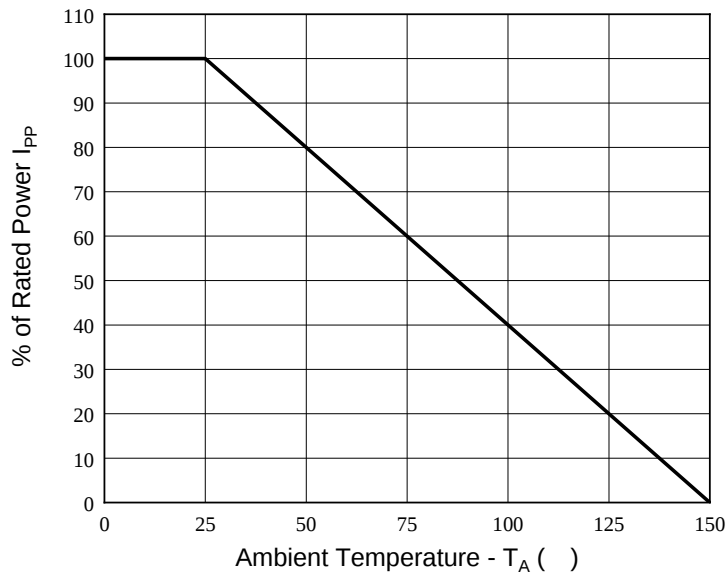


Fig.4: Peak Pulse Cu



ESD3V3D3BSQ

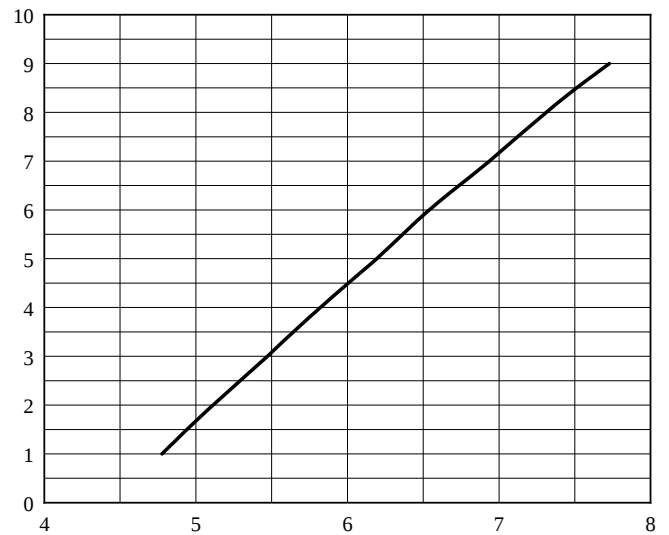