


Zener Diodes, 40 Watt Peak Power Dual Common Anode Zeners

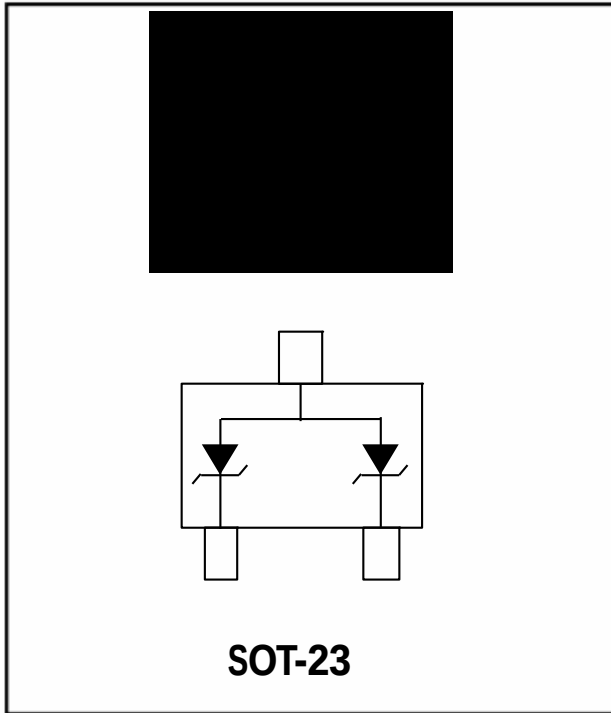

Features

" 6271 3DFNDJH \$OORZV (LWKHU 7ZR 6H
8QLGLUHFWRQDO & RQILJXUDWLRQ
%LGLUHFWRQDO & RQILJXUDWLRQ
" 3HDN 3RZHU :# PV 8QLGLUHFWRQDO
" 7UDQVLHQW SURWHFWLRQ IRU HDFK O
, (& (6' "9 NRQWDFW " N9 DLU
" (6' 5DWLQJ & OD.VSHU WKH +%0
" 0D[LPXP & ODPSLQJ 9ROWDJH#3HDN 3XO
" 5R+6 & RPSOLDQW
" 3DUW QR Z4WKHDXQVL\$ (& 4 TXDOLILH


Applications

" 7HVW (TXLSPHQW ,QVWUXPHQWDWLRQ
" 1RWHERRNV 'HVNWRSV 6HUYHUV
" & RPSXWHU 3HULSKHUDOV
" \$XWRPRWLYH DSSOLFDWLRQV

Mechanical Data

" 3DFNDJH 627
" /HDG)LQLVK 0DWWH 7LQ
" & DVH 0DWHULDO 3*UHHQ' 0ROGLQJ & R
" 0RLVWXUH 6HQVLWLYLWL /HYHO SHU

Definitions of electrical characteristics

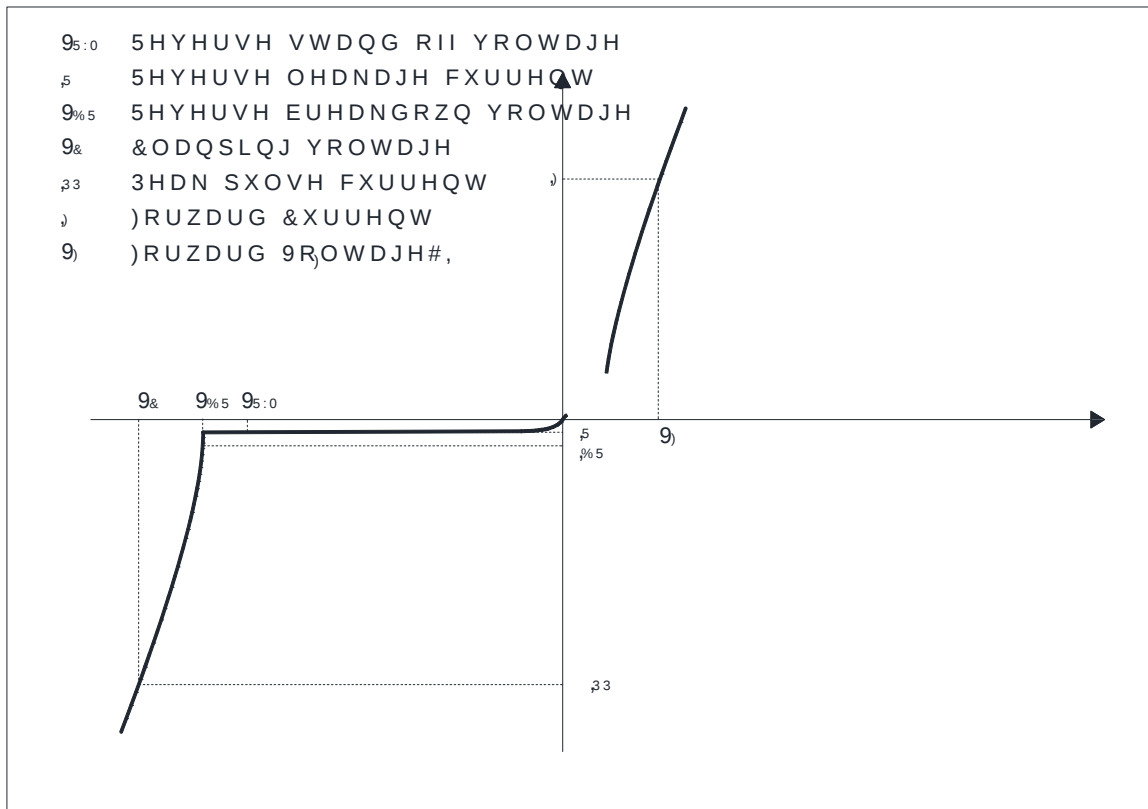




MMBZ27VAQ

Maximum Ratings


PARAMETER	SYMBOL	LIMITS	UNIT
3 HDN SXOVH ₃ SRZHU W	3 _{SN}		:
(6' DFFRUGLQJ WR ,(& DLU GLVFKDUJH	9 _{(6'}	"	.9
(6' DFFRUGLQJ WR ,(& FRQWDFW GLVFKDUJH		"	

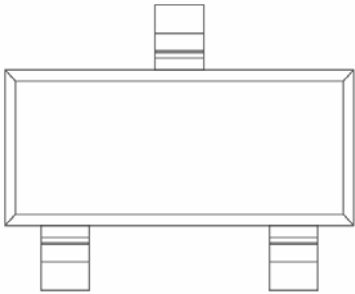



MMBZ27VAQ

3RZHU 'LVVLSDWLRQ P: vCharacteristics 7\SLFDO
)LJ . 3

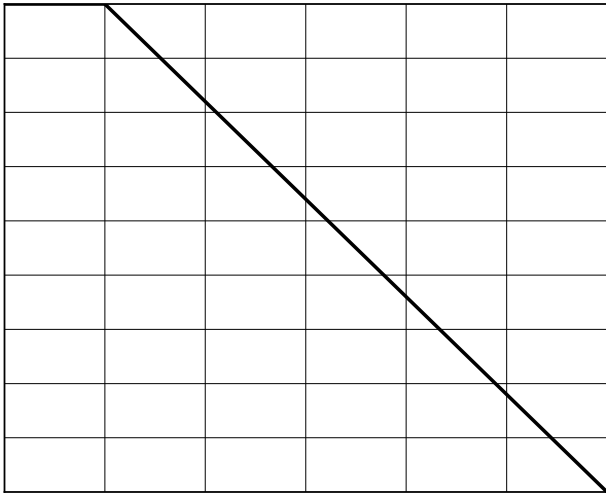


7_{\$}



3H DN 3XOVH 'HUDWLQJ , Q 2I 3HDN 3RZHU
2U &XUUHQW#7


)LJ 3RZHU 'HUDWLQJ &XUYH

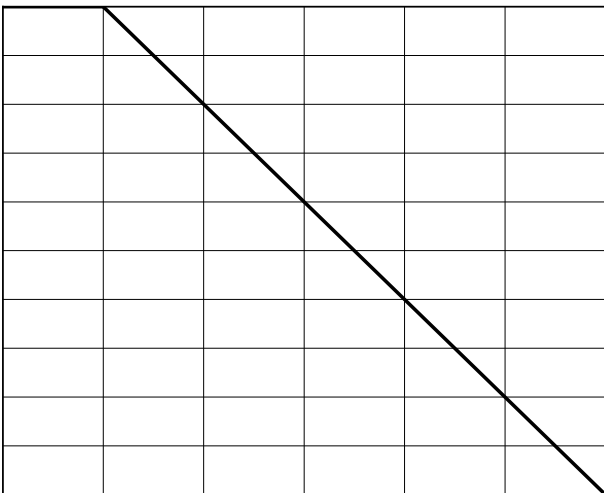

\$PELHQWUDWSH 7

MMBZ27VAQ

vOutline Dimensions

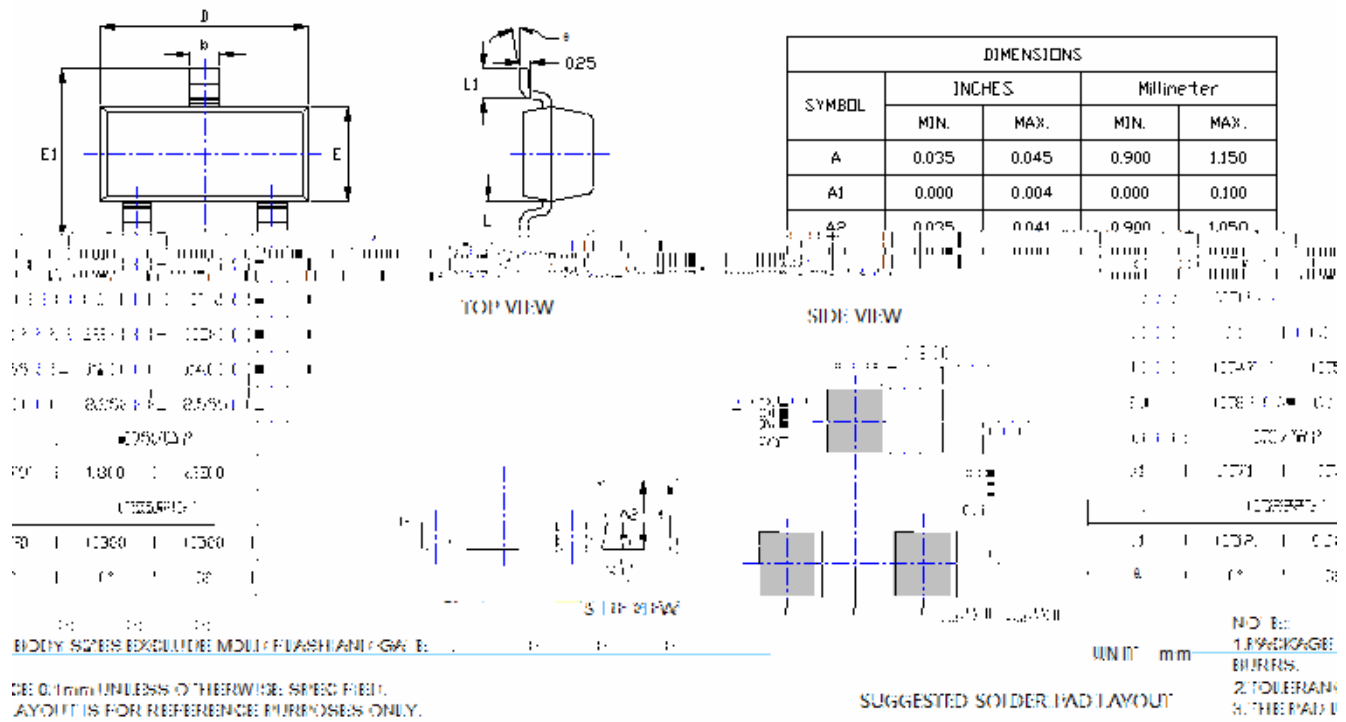

MMBZ27VAQ
