




Epoxy meets UL-94 V-0 flammability rating  
Moisture Sensitivity Level 1  
Ultra-small surface mount package  
Part no. with suffix "Q" means AEC-Q101 qualified

Ideal for Medium Power Amplification and Switching

SOT-363

Tin plated leads, solderable per  
J-STD-002 and JESD22-B102  
K4M

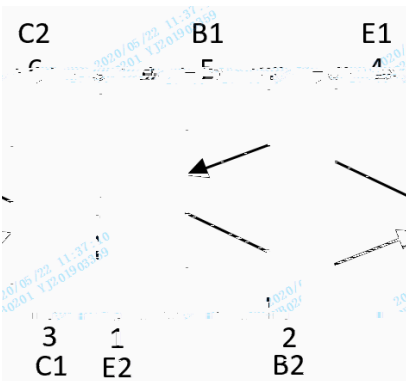

(Example)


MMDT5401Q	F2	Approximate 0.009g	3000	30000	120000	7" reel


ied

V

-160

(Typical)

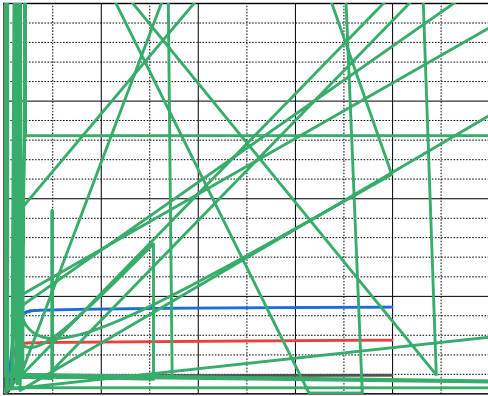

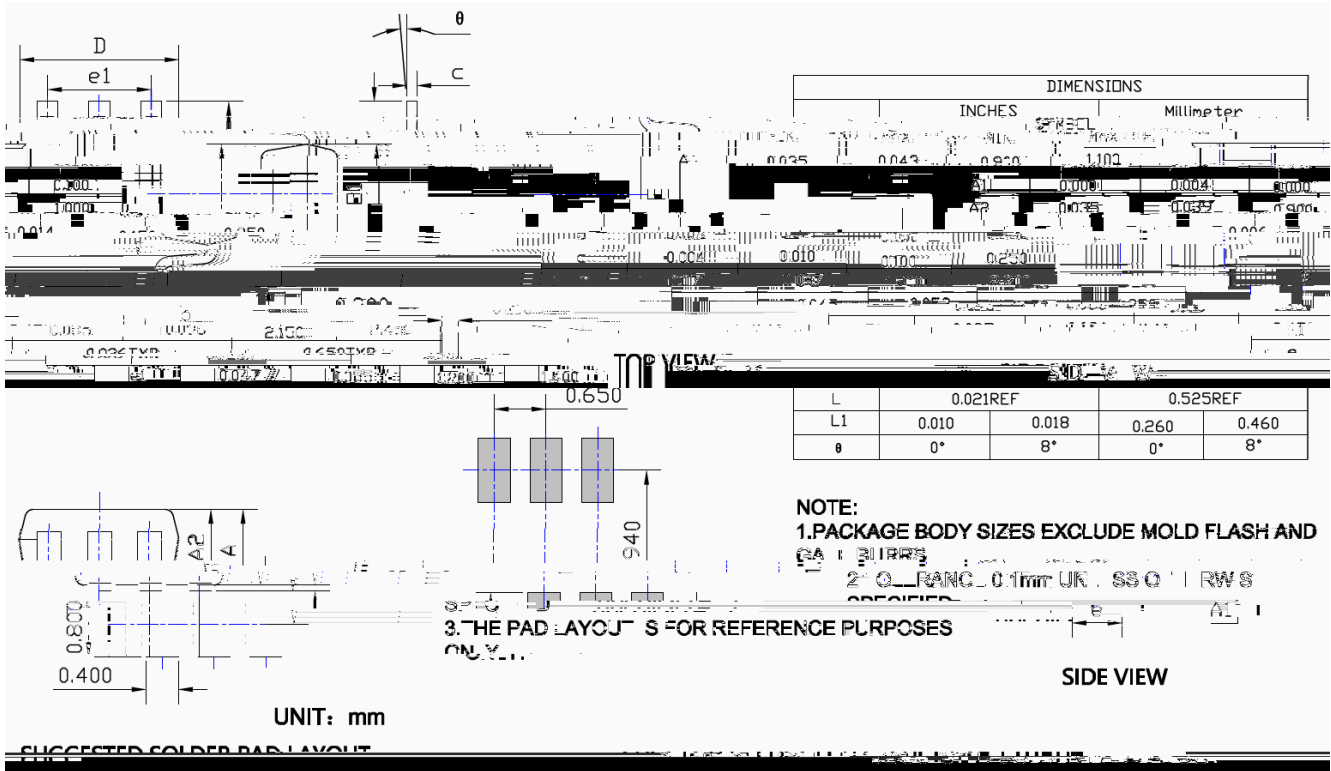



---

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics are not designed for use in medical, life-saving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.