




1N4148WL2

RoHS
COMPLIANT

Fast Switching Diode

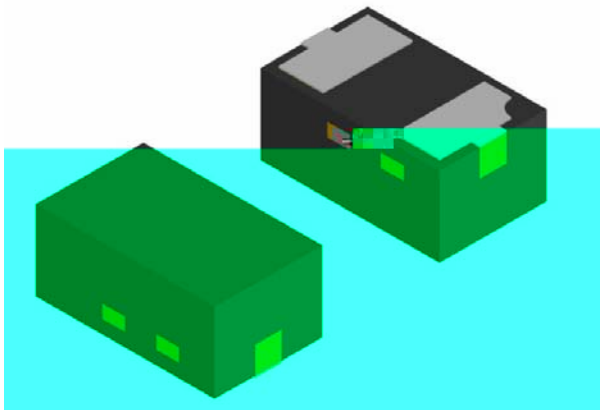


Features

-
-
-
-
-
-
-

Mechanical Data

- Package
- Terminals
- Polarity
- Marking



Maximum Ratings




PARAMETER	SYMBOL	UNIT	Conditions	VALUE

Ordering Information


PREFERED P/N	UNIT WEIGHT(mg)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE

1N4148WL2

Characteristics

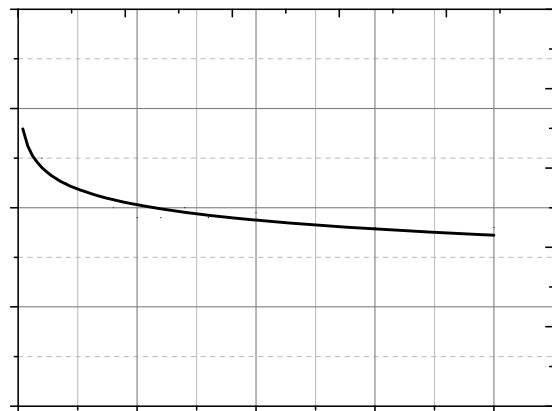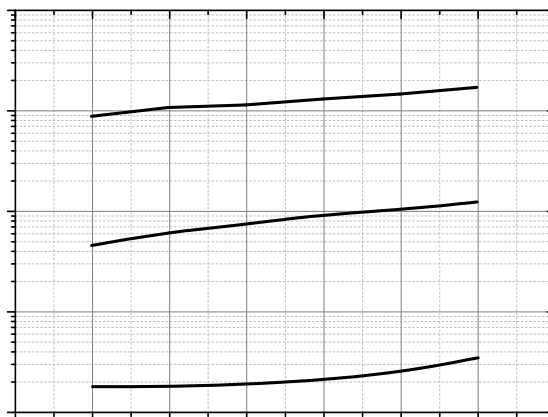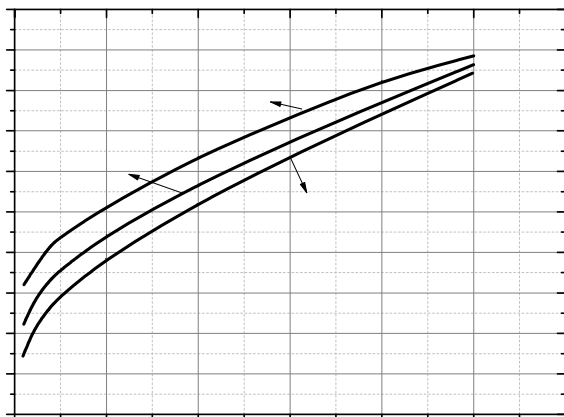


Outline Dimensions

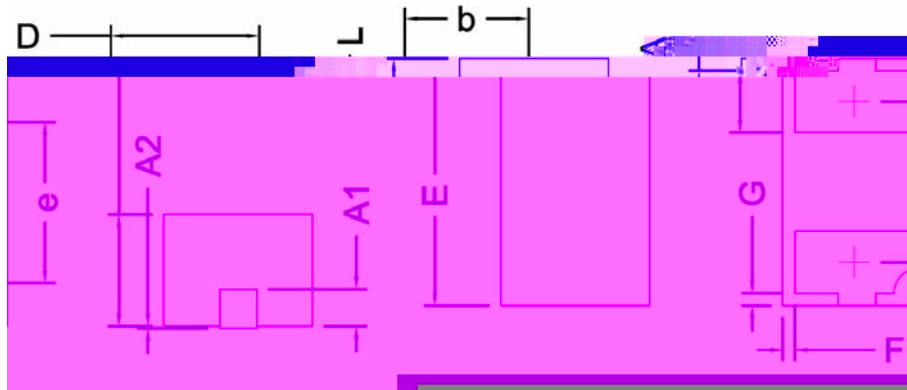

MIN	NOM	MAX	SYMBOL
0.50	0.60	0.70	D
0.90	1.00	1.10	F
0.35	0.45	0.55	A1
0.15 BSC		0.10	A2
0.005			F
0.005			G
0.15	0.25	0.35	L
0.41	0.50	0.59	b
0.65 BSC			e

■ Soldering Footprint





1N4148WL2

RoHS
COMPLIANT

Disclaimer
