




Dual Switching Diode

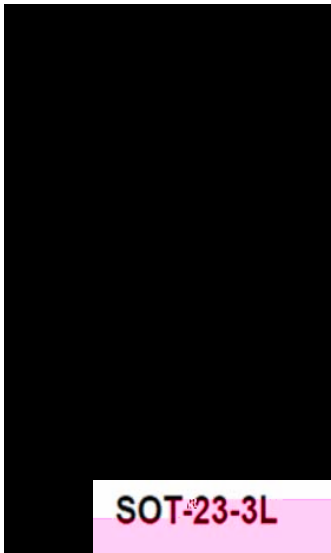

Features

- Moisture sensitivity level 1
- Reverse voltage 75V
- Average forward current 150mA

Application

- Signal switching
- High frequency rectifier

Mechanical data

- Packaging Maximum Rate 4725g unless

3DUDPHWHU	6\PERO	8QLW	9DOXH
'HYLFH PDUNLQJ FRGH			\$
5HSHWLWL YHHUSHDYRDMW DJH	550	9 9	
)RUZDUG FXUUHQW	)	,P\$	
1RQ UHSHWLWL YH 6XXUHQW#IRUZDUGYKDO I VLQH Z	)60		
1RQ UHSHWLWL YH 6XXUHQW#IRUZDUGYKDO I VLQH Z			\$
3RZHU GLVVLSDWLRQ	.	P3:	
-XQFWLRQ WHPSHUDWXUH	-	- 7	WR
6WRUDJH WHPSHUDWXUH	67*	- 7	WR

BAV70KA

RoHS
COMPLIANT

~+

v2UGHULQJ ,QIRUPDWLRQ

0‡

3UHIHUUHC	3DFNL FRGH	8QLW ZHLJ	0LQLPXP SDFNDJH	,QQHU ER TXDQWLW\	2XWHU FDUWF SFV	'HOLYHU\ PRGH
%%\$9 .\$.	)	\$SSUR[LPDWH				. UHH

v2XWOLQH 'LPHQVLRQV

0‡

v6XJJHVWHG 3DG /D\RXW

0‡

0‡

0‡

0‡

0‡

0‡

BAV70KA

RoHS
COMPLIANT

0‡

'LVFODLPHU

7KH LQIRUPDWLRQ SURFHVWHU LV IRXUHQJH RQH RQJMLH (OHFWURQLF 7HHQROR
ULJKW WR PDNH FKDLFHV RZLWKR XSKRSLURGXERQ/ RILWSOD\HG KHUHLQ WR GPSURQ
RU RWKHUZLVH

7KH SURGXFW OLVWHG KHUHLQ LV GHOLJDWRU RFEHTXVLSBHQLWIRURUGHLQFHWWDQG
HTXLSPHQW RU GHYLFHV ZKLFK UHTXLW KHKEPDIOXQFHWLRQ URHQLDEKLQBWODXSKUDFWO
PHGLFDO LQVWUXPHQWQ HTXDQVSRWWDHUURQSDPHIDUHLDFWRU FRQWUROQHWW IX
GHYLFHV <DQJMLH RU DQ\RQH RQ LWLOEHWK DQI ODVEXDEW\QIRWHDQSRQDREJXVHUHV
RIVDOH

7KLV SXEOLFDWLRQ SXSDSHUWIDG\VLQURUPDWSRQLSGHYRLRXDGLRQLRQDOLVQWHLPLWRX
KWWWSZZ\DOJMLHFRP RQVXOW\RXUHQDOHVRIHQMLBWDQVHKHU D
0‡