




Ultra-Fast Recovery Diodes 8A FRED

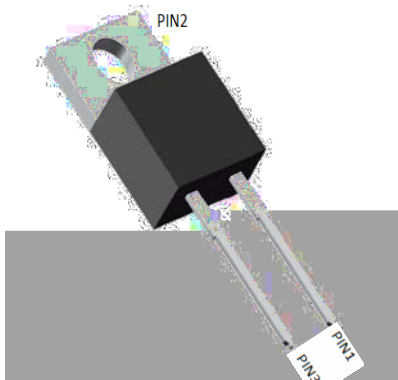

Features

- Adopt FRED chip
- Low forward Voltage drop
- Fast reverse recovery time
- High frequency operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability

Typical Applications

Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

Mechanical Data

- **Package:** TO-220AC
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

MUR820	
MUR820	
200	
41	



MUR820

■Electrical Characteristics


PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	Min	Typ	Max
-----------	--------	------	-----------------	-----	-----	-----

Instantaneous forward voltage drop per diode @ r_{f} mV Q M



■Characteristics (Typical)

FIG.5: Diagram of circuit and Testing wave form of reverse recovery time

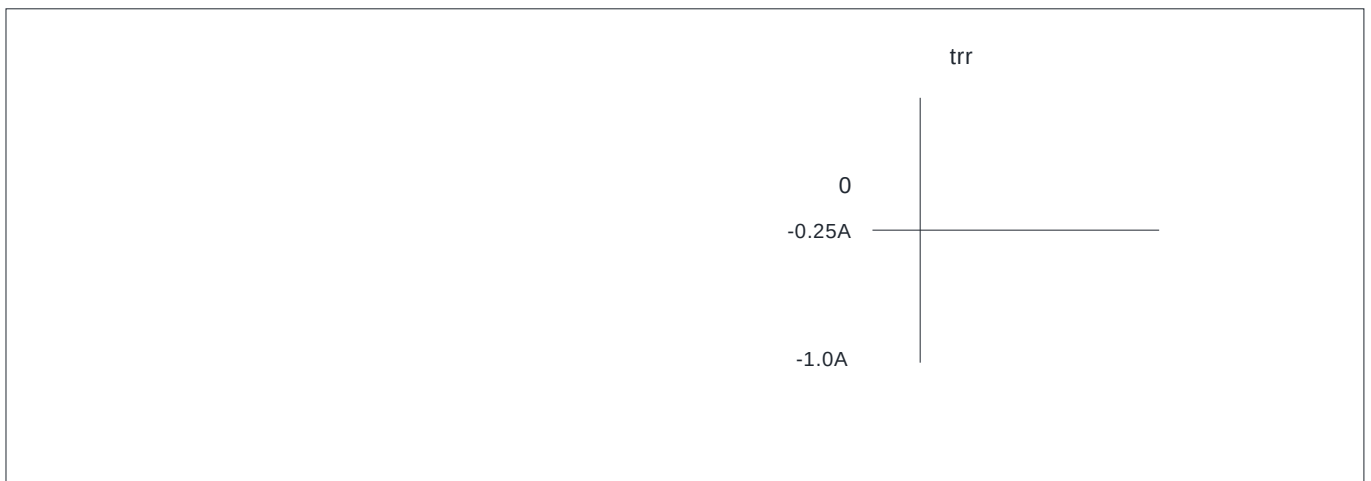



■Outline Dimensions

