

ZP1350-RECTIFIER DIODE

Jiangsu Yangjie Runau Semiconductor Co.,Ltd


2500-3500V_{RRM}

GENERAL PURPOSE HIGH POWER STANDARD RECTIFIER

Features:

- . All Diffused Structure
- . High Surge rating
- . Blocking capability up to 3500 volts
- . Ceramic Housing Hermetic Package
- . Pressure Assembled Device

ZT55cT

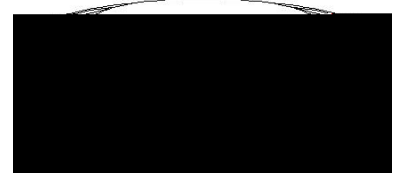

ELECTRICAL CHARACTERISTICS AND RATINGS

Reverse Blocking

V_{RRM} = Repetitive peak reverse voltage

V_{RSM} = Non repetitive peak reverse voltage (2)

Repetitive peak reverse leakage	I_{RRM}	5 mA 50 mA (3)
------------------------------------	-----------	-------------------

Conducting Assembled Devi

