




Schottky Diodes

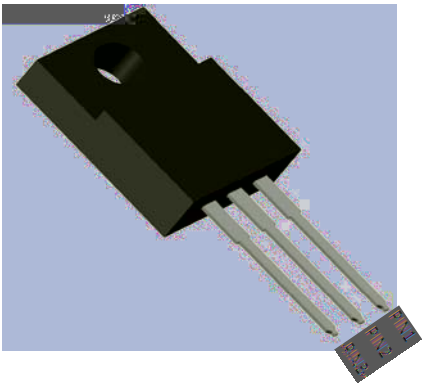

Features

- +LJK IUHTXHQF\ RSHUDWLRQ
- +LJK SXULW\ KLJK WHPSHUDWXUH HSR[\ HQ
- HQKDQFHG PHFKDQDQDOPRWWXUWKUHLVWD
- *XDUG ULQJ IRU HQDVFHQGUORJHGWHP UH
- 6ROGHU GLS f& PD[V SHU -(6' %

б L

'HYLFH PDUNLQJ FRGH			0%5))&7
5HSHWLWLYH 3HDN 5HYHUVH 9R5WDJH 9			
\$YHUDJH 5HFWLILHG 2XWSXW &XUUHQW # \$ +]			
VLQH ZDYH 5 ORDG 7			
6XUJH 1RQ UHSHWLWLYH)RUZDUG &XUUHQW			
# +]KDOI VLQH ZDYH F\FOH 760			
&XUUHQW 6TXDUHG 7LPH # PV"W,W PV \$ V			
7M È			
6WRUDJH 7HPSHUDWXUH	7VWJ		a
-XQFWLRQ 7HPSHUDWXUH	7M		a

Electrical Characteristics 7D 8QOHVV RWKHUÀLVH VSHFLILHG

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	MBR20F60FCT
-----------	--------	------	-----------------	-------------

0D[LPXP LQVWDQWDQHRXV
IRUZDUG YROWDJH GURS SHU GD\$dpÀ 7D?~y·S y€0ÀÀ550 950 9550

--	--	--	--

D Zîî&òî& dr írtñîõě,&



TO-220AB(W5094)

Cross-section

Dimensions: L, W, M

ITO-220AB		
' L P	0 L Q	0 D [
\$		
%		
&		
'		
(		
)		
*		
+	7 < 3	
,	7 < 3	
-		
.		
/		
0		
1		
2	7 < 3	
3		
4		
5		
6	7 < 3	
7		
8		
9		

M.R F F/T-. -W 9 HF

<DQJ]KRX <DQJMLH (OHFWURQL