



Surface Mount Schottky Rectifier

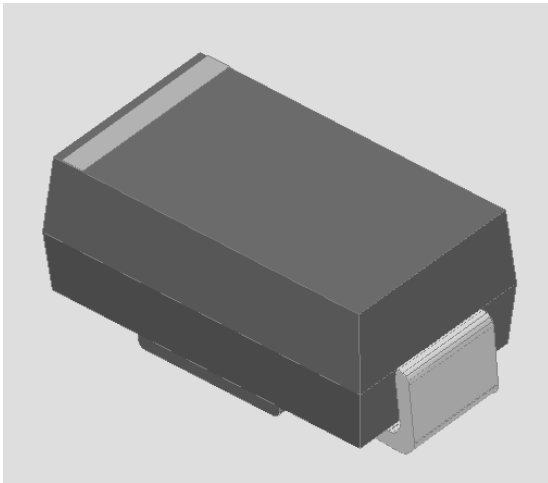

Features

- N+ IMP Passivation Dep
- Low profile package
- Ideal for automated placement
- Guardring for overvoltage protection
- Low power losses, high efficiency
- High forward surge capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

Typical Applications

For use in low voltage high frequency inverters, freewheeling, DC/DC converters, and polarity protection applications.

Mechanical Data

- **Package:** DO-214AC (SMA)
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Cathode line denotes the cathode end

■Maximum Ratings (T_a=25 Unless otherwise specified

PARAMETER	SYMBOL	UNIT	SS								
			32AH	33AH	34AH	35AH	36AH	38AH	310AH	315AH	320AH
Device marking code			SS								
			32AH	33AH	34AH	35AH	36AH	38AH	310AH	315AH	320AH
Repetitive peak reverse voltage	V _{RRM}	V	20	30	40	50	60	80	100	150	200
Average rectified output current @60Hz sine wave, resistance load, Tc (FIG.1)	I _o	A	3.0								
Surge(non-repetitive)forward current @60Hz half-sine wave,1 cycle, Tj=25	I _{FSM}	A	70								
Surge(non-repetitive)forward current M											
			-55 ~+175								

Junction temperature	T _j		-55~+150				-55 ~+175			



SS32AH THRU SS320AH

■Electrical Characteristics $T_a=25$ Unless otherwise specified

PARAMETER		SYMBOL	UNIT	TEST CONDITIONS	MIN	TYP	MAX
Instantaneous forward voltage drop per diode	SS32AH~SS34AH	V _F	V	I _{FM} =3.0A	-	0.46	0.50
	SS35AH~SS36AH				-	0.59	0.70
	SS38AH~SS310AH				-	0.75	0.85
	SS315H~SS320AH				-	0.81	0.90
DC reverse current at rated DC blocking voltage per diode @ V _{RM} =V _{RRM}	SS32AH~SS34AH	I _{RRM}	mA	T _j =25	-	-	0.50
				T _j =125	-	-	5.0
	SS35AH~SS36AH			T _j =25	-	-	0.50
				T _j =125	-	-	5.0
	SS38AH~SS310AH			T _j =25	-	-	0.10
				T _j =125	-	-	5.0
	SS315H~SS320AH			T _j =25	-	-	0.10
				T _j =125	-	-	5.0

Note1:Pulse test:300uS pulse width,1% duty cycle

Note2:Pulse test:pulse width 40mS



■Thermal Characteristics $T_a=25$ Unless otherwise specified

PARAMETER	SYMBOL	UNIT	SS			
			32AH	34AH	35AH	36AH



SS32AH THRU SS320AH


■ Characteristics (Typical)

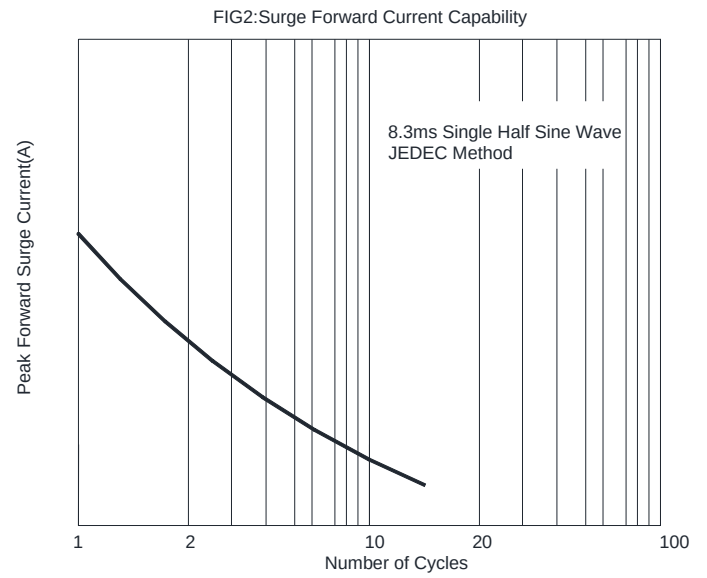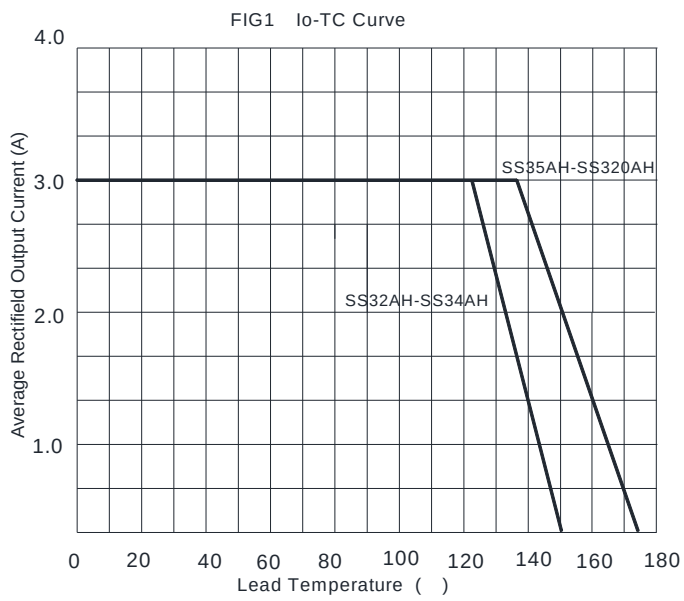

SS32AH THRU SS320AH



■Suggested Pad Layout

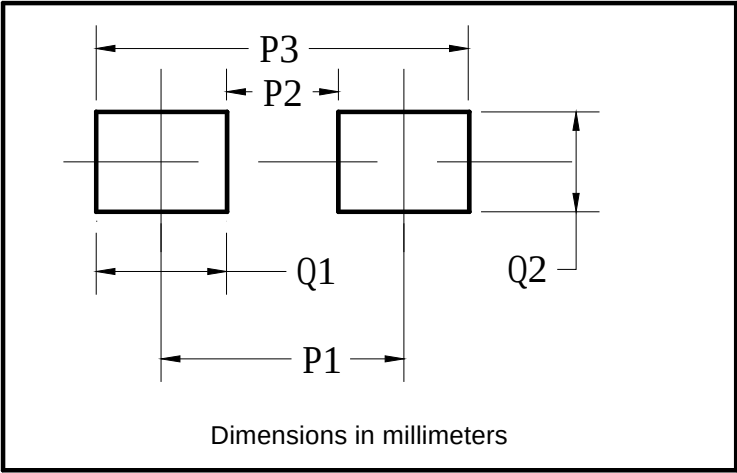

DO-214AC(SMA)	
Dim	Millimeters
P1	4.00
P2	1.50
P3	6.50
Q1	2.50
Q2	1.70



SS32AH THRU SS320AH

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility.