




■ $T_a=25$ Unless otherwise specified

Maximum instantaneous forward voltage drop per diode	V_F	V	$I_{FM}=12.5A$	1.0						
Maximum DC reverse current at rated DC blocking voltage per diode	I_R	μA	$T_j=25$	5						
			$T_j=125$	100						
Typical junction capacitance	C_j	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	95						

■ $T_a=25$ Unless otherwise specified

Thermal Resistance	Between junction and ambient, Without heatsink	$R_{\theta J-A}$	/W	18						
	Between junction and case, With heatsink	$R_{\theta J-C}$		0.8						

■

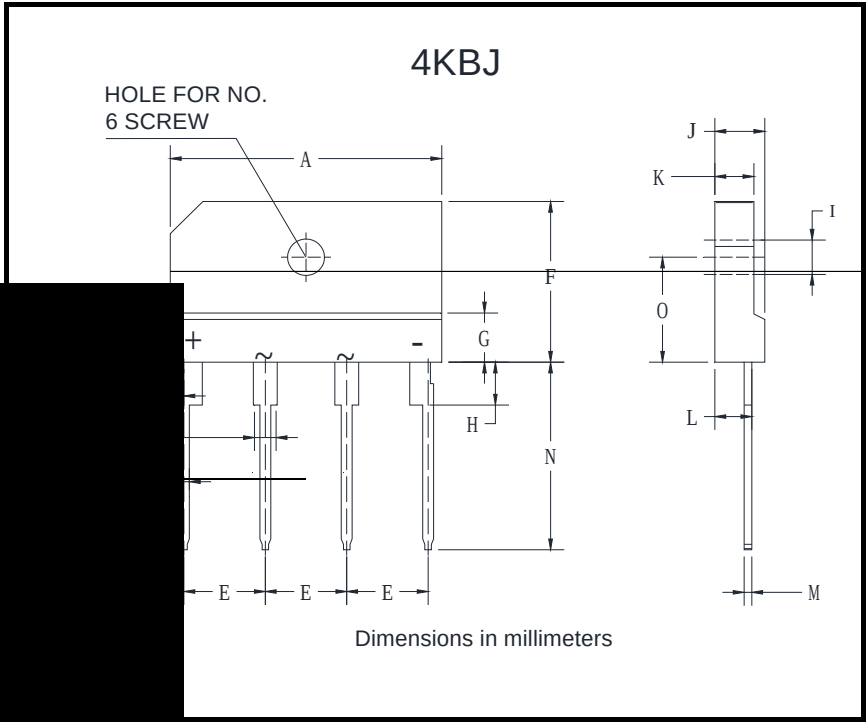

Dim	Min	Max
A	24.7	25.3
B	1.05	1.45
C	1.7	2.1
D	0.9	1.1
E	7.3	7.7
F	14.7	15.3
G	3.8	4.2
H	3.3	3.7
I	3.1	3.4
J	4.4	4.8
K	3.4	3.8



The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the products displayed herein to improve reliability, function or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction which would directly endanger human lives (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damage resulting from such improper use of the product.

This publication contains all information previously supplied. For additional information, please visit our website <http://www.21yangjie.com>, or consult your nearest Yangjie's sales office for assistance.